

WAU060-2000-G

Electrical Specifications (@25C)

1. Primary Rating: 120V 60Hz
2. Primary Excitation Current: <4mA
3. Secondary Rating: 6VAC \pm 5%, 2000mA AC
4. Secondary No-Load Rating: <7.8VAC Ref.
5. No Load Power (stand by): \leq 0.21W
6. Average Efficiency: 82.96%. Meets minimum level VI efficiency*
7. Operating Temperature Range: -10 Deg C to +40 Deg C
8. Temperature Rise: 30 Deg C Max at rated load

Mechanical Parameters:

Case Type: Thermoplastic molded enclosure.
Output Cord: 18 AWG, 6 Ft. Long Min.

Mating Connector: MOLEX 43640-0300 or equivalent

Warranty: 10 Years

Agency File:


UL/CUL: File E341931, UL 1310

A. Dimensions:

H	W	D
79.6	59.7	48.1

*Units: In Millimeter


B. Schematic:



DOE/CEC Compliance: This power supply meets the minimum efficiency levels for direct operation as defined by DOE Docket Number EERE-2008-BT-STD-0005-0219.

RoHS Compliance: As of manufacturing date February 2005, all standard products meet the requirements of 2011/65/EU, known as the RoHS initiative.

* Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.

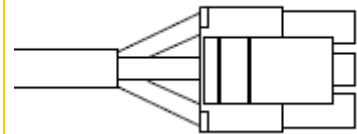


TRIAD

CLASS 2 POWER SUPPLY

MODEL: WAU060-2000-G


INPUT: 120VAC 60Hz, 16W

OUTPUT: 6VAC @ 2000mA



US
E341931

LISTED
EPBU
E341931



RoHS
XXXX

MADE IN CHINA